

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
25 May 2001 (25.05.2001)

PCT

(10) International Publication Number  
**WO 01/36536 A1**

- (51) International Patent Classification<sup>7</sup>: C08L 77/00, 71/12, H01B 1/24, C08K 3/34
- (21) International Application Number: PCT/US00/27907
- (22) International Filing Date: 10 October 2000 (10.10.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/438,998 12 November 1999 (12.11.1999) US
- (71) Applicant: GENERAL ELECTRIC COMPANY  
[US/US]; 1 River Road, Schenectady, NY 12345 (US).
- (74) Agents: SNYDER, Bernard et al.; General Electric Company, 3135 Easton Turnpike W3C, Fairfield, CT 06431 (US).
- (81) Designated States (*national*): CN, ID, JP, SG.
- (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- Published:  
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*
- (72) Inventors: KOEVOETS, Christiaan, Henricus; Heesterberg 40, NL-4708 HS Roosendaal (NL). MATTHIJSEN, Johannes; Bennekens 12, NL-4724 CT Wouw (NL).



**WO 01/36536 A1**

(54) Title: CONDUCTIVE POLYPHENYLENE ETHER-POLYAMIDE BLEND

(57) Abstract: The present invention relates to a thermoplastic resin composition and a method for making the same. The composition comprises the reaction product of about 10 wt % to about 50 wt % polyphenylene ether, about 35 wt % to about 65 wt % polyamide, preferably about 0.4 wt % to about 3.0 wt % carbon fibrils, and optionally about 5 wt % to about 40 wt % talc, up to about 10 wt % compatibilizing agent and up to about 20 wt % impact modifier. The method comprises forming a carbon masterbatch with polyamide and introducing the masterbatch and the polyamide subsequent to compounding the polyphenylene ether with a compatibilizing agent.

## CONDUCTIVE POLYPHENYLENE ETHER- POLYAMIDE BLEND

### BACKGROUND OF THE INVENTION

#### Field of the Invention

The present invention relates to a conductive thermoplastic resin, and especially relates to a conductive polyphenylene ether-polyamide blend.

#### 5 Brief Description of the Related Art

Poly(phenylene ether) resins (referred to hereafter as "PPE") are commercially attractive materials because of their unique combination of physical, chemical, and electrical properties. Furthermore, the combination of these resins with polyamide (PA) resins into compatibilized blends results in  
10 additional overall properties such as chemical resistance, high strength, and high flow. Examples of such compatibilized blends can be found in U.S. Patents 4,315,086 (Ueno, et al); 4,659,760 (van der Meer); and 4,732,938 (Grant, et al). The properties of these blends can be further enhanced by the addition of various additives such as impact modifiers, flame retardants, light  
15 stabilizers, processing stabilizers, heat stabilizers, antioxidants and fillers.

The physical properties of PPE/polyamide blends make them attractive for a variety of end-use articles, for example, in the automotive market, for various exterior components. Dimensional behavior of these components is critical due to the differences in coefficient of thermal  
20 expansion, which can be improved by adding fillers (organic/inorganic) as known to those skilled in the art.

U.S. Patent No. 5,591,382 to Nahass et al., discloses a polymeric composition comprising carbon fibrils, at least a portion of which are in the form of aggregates, wherein, as measured on an area basis, substantially all of

the aggregates are less than about 35  $\mu$  in diameter. The polymeric composition is prepared by combining the carbon fibrils with a polymeric material, mixing the combination to distribute the fibrils in the polymeric material and applying shear to the combination to break down the aggregates  
5 until substantially all of the aggregates are less than about 35  $\mu$  in diameter. Nahass et al. teach the use of a lower loading of the conductive fibrils in order to achieve a certain conductivity while retaining better impact performance compared to carbon black or carbon fibers.

Although numerous PPE/polyamide compositions having a  
10 variety of properties are available, compositions having alternative properties are continuously sought in the industry.

#### BRIEF SUMMARY OF THE INVENTION

The present invention relates to a thermoplastic resin composition and a method for making the same. The composition comprises:  
15 about 10 weight percent (wt%) to about 50 wt% polyphenylene ether, about 35 wt% to about 65 wt% polyamide, about 5 wt% to about 40 wt% talc, and about 0.4 wt% to about 3.0 wt% carbon.

The method comprises: forming a talc masterbatch comprising about 40 wt% to about 50 wt% talc and about 50 wt% to about 60 wt%  
20 polyamide; forming a carbon masterbatch comprising about 10 wt% to about 30wt% carbon and about 70 wt% to about 90 wt% polyamide; introducing polyphenylene ether and a compatibilizer to an extruder; maintaining the extruder at a sufficient temperature to melt the polyphenylene ether; introducing polyamide, said carbon masterbatch to the extruder at a  
25 downstream port; forming a thermoplastic composition comprising the reaction product of about 10 weight percent (wt%) to about 50 wt%

polyphenylene ether; about 35 wt% to about 65 wt% polyamide; and about 0.4 wt% to about 3.0 wt% carbon.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Referring now to the drawings which are meant to be  
5 illustrative, not limiting:

Figure 1 is a graph of melt volume rate (MVR) as a function of specific volume resistivity (SVR).


Figure 2 is a graph of melt viscosity (MV) as a function of specific volume resistivity (SVR).

#### 10 DETAILED DESCRIPTION OF THE INVENTION

The thermoplastic composition of the present invention comprises both the mixture and reaction product(s) of: polyphenylene ether, polyamide, talc, and carbon fibrils, along with, optionally, compatibilizers, impact modifiers and various additives. The thermoplastic composition can  
15 comprise about 10 weight percent (wt%) to about 50 wt% polyphenylene ether, about 35 wt% to about 65 wt% polyamide, about 5 wt% to about 40 wt% talc, and about 0.4 wt% to about 3.0 wt% carbon (preferably in the form of fibrils), with about 15 wt% to about 30 wt% polyphenylene ether, about 45 wt% to about 55 wt% polyamide, about 15 wt% to about 25 wt% talc, about  
20 0.6 wt% to about 1.5 wt% carbon fibrils, and optionally from 0 to about 10 wt% compatibilizer and from 0 to about 20 wt% impact modifier, preferred, (balance additives) based on the total weight of the composition.

#### Poly(arylene) ether

Although all conventional poly(arylene ether)s can be employed with the present invention, polyphenylene ethers ("PPE") are preferred. polyphenylene ethers are known polymers comprising a plurality of structural units of the formula (I):

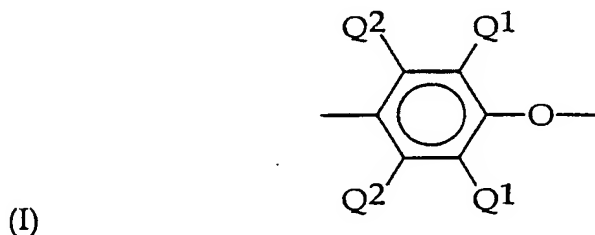

wherein for each structural unit, each Q<sup>1</sup> is independently halogen, primary or secondary lower alkyl (e.g., alkyl containing up to 7 carbon atoms), phenyl, haloalkyl, aminoalkyl, hydrocarboxy, or  
 10 halohydrocarboxy wherein at least two carbon atoms separate the halogen and oxygen atoms; and each Q<sup>2</sup> is independently hydrogen, halogen, primary or secondary lower alkyl, phenyl, haloalkyl, hydrocarboxy or halohydrocarboxy as defined for Q<sup>1</sup>. Preferably,  
 15 each Q<sup>1</sup> is alkyl or phenyl, especially C<sub>1-4</sub> alkyl, and each Q<sup>2</sup> is hydrogen.

Both homopolymer and copolymer poly(arylene ether) are included. The preferred homopolymers are those containing 2,6-dimethylphenylene ether units. Suitable copolymers include random copolymers containing, for example, such units in combination with 2,3,6-trimethyl-1,4-phenylene ether units or copolymers derived from  
 20 copolymerization of 2,6-dimethylphenol with 2,3,6-trimethylphenol. Also

included are poly(arylene ether) containing moieties prepared by grafting vinyl monomers or polymers such as polystyrenes, as well as coupled poly(arylene ether) in which coupling agents such as low molecular weight polycarbonates, quinones, heterocycles and formals undergo  
5 reaction in known manner with the hydroxy groups of two poly(arylene ether) chains to produce a higher molecular weight polymer. Poly(arylene ether)s of the present invention further include combinations of any of the above.

The polyphenylene ether generally has a number average  
10 molecular weight within the range of about 3,000-40,000 and a weight average molecular weight within the range of about 20,000-80,000, as determined by gel permeation chromatography. The poly(arylene ether) generally has an intrinsic viscosity often between about 0.10-0.60 deciliters per gram (dl/g), preferably in the range of about 0.29 -0.48 dl/g, all as  
15 measured in chloroform at 25°C. It is also possible to utilize a high intrinsic viscosity poly(arylene ether) and a low intrinsic viscosity poly(arylene ether) in combination. Determining an exact ratio, when two intrinsic viscosities are used, will depend somewhat on the exact intrinsic viscosities of the poly(arylene ether) used and the ultimate physical  
20 properties that are desired.

The polyphenylene ether are typically prepared by the oxidative coupling of at least one monohydroxyaromatic compound such as 2,6-xylenol or 2,3,6-trimethylphenol. Catalyst systems are generally employed for such coupling; they typically contain at least one heavy  
25 metal compound such as a copper, manganese or cobalt compound, usually in combination with various other materials.

Particularly useful polyphenylene ether for many purposes are those which comprise molecules having at least one aminoalkyl-containing end group. The aminoalkyl radical is typically located in an ortho position to the hydroxy group. Products containing such end groups may be obtained by incorporating an appropriate primary or secondary monoamine such as di-n-butylamine or dimethylamine as one of the constituents of the oxidative coupling reaction mixture. Also frequently present are 4-hydroxybiphenyl end groups, typically obtained from reaction mixtures in which a by-product diphenoquinone is present, especially in a copper-halide-secondary or tertiary amine system. A substantial proportion of the polymer molecules, typically constituting as much as about 90% by weight of the polymer, may contain at least one of said aminoalkyl-containing and 4-hydroxybiphenyl end groups.

It will be apparent to those skilled in the art from the foregoing that the polyphenylene ether contemplated for use in the present invention include all those presently known, irrespective of variations in structural units or ancillary chemical features.

### Polyamide

The polyamide resins useful in the practice of the present invention are a generic family of resins known as nylons, characterized by the presence of an amide group ( $-C(O)NH-$ ). Nylon-6 and nylon-6,6 are the generally preferred polyamides and are available from a variety of commercial sources. Other polyamides, however, such as nylon-4,6, nylon-12, nylon-6,10, nylon 6,9, nylon 6/6T and nylon 6,6/6T with triamine contents below about 0.5 weight percent, as well as others, such as the amorphous nylons may be useful for particular polyphenylene ether-polyamide applications. Mixtures of various polyamides, as well as various polyamide

copolymers, are also useful. The most preferred polyamide for the blends of the present invention is polyamide-6,6.

The polyamides can be obtained by a number of well known processes such as those described in U.S. Patent Nos. 2,071,250; 2,071,251; 2,130,523; 2,130,948; 2,241,322; 2,312,966; and 2,512,606. Nylon-6, for example, is a polymerization product of caprolactam. Nylon-6,6 is a condensation product of adipic acid and 1,6-diaminohexane. Likewise, nylon 4,6 is a condensation product between adipic acid and 1,4-diaminobutane. Besides adipic acid, other useful diacids for the preparation of nylons include azelaic acid, sebacic acid, dodecane diacid, as well as terephthalic and isophthalic acids, and the like. Other useful diamines include m-xylylene diamine, di-(4-aminophenyl)methane, di-(4-aminocyclohexyl)methane; 2,2-di-(4-aminophenyl)propane, 2,2-di-(4-aminocyclohexyl)propane, among others. Copolymers of caprolactam with diacids and diamines are also useful.

Polyamides having viscosity of up to about 400 ml/g can be used, with a viscosity of about 90 to about 350 ml/g preferred, and about 110 to about 240 ml/g especially preferred, as measured in a 0.5 wt% solution in 96 wt% sulphuric acid in accordance with ISO 307.

#### Fillers

Preferably a sufficient amount of filler is employed to reduce the coefficient of thermal expansion, improve dimensional behavior (flow as well as cross flow) of the composition without having too much of a negative effect on surface finish, flow and impact. Although mica, talc, clay, glass fibers, and other fillers can be employed, talc is preferably employed as at least one of the filler(s) due to better surface finish and reduced effect on impact strength compared to glass fibers (for example), and greater reduction in the coefficient



of thermal expansion compared to clays (for example). Although from 0 to about 50 wt% filler can be used, based on the total weight of the thermoplastic composition, about 5 to about 40% filler is preferred, with about 15 wt% to about 25 wt% especially preferred. The talc is preferably a Mg-silicate with an average particle size of about 3.0 microns to about 5.0 microns, with an average size of about 4.0 microns to about 5.0 microns preferred; with particle size distribution of greater than about 90% under about 20 microns, with greater than about 95% under about 20 microns preferred, and about 98% or greater under 20 microns especially preferred.

#### 10 Conductive Material

The conductive material can be any material which does not significantly adversely effect the physical characteristics of the thermoplastic composition, such as carbon and the like. The carbon can be in the form of carbon black ("CCB"; e.g. Ketjenblack EC 600 JD available from AKZO, Deventer, The Netherlands), and carbon fibrils ("CF"), (e.g., BN fibrils available from Hyperion Catalysis International, Cambridge, MA 01921 USA), with carbon fibrils preferred, such as those disclosed in patent WO/94/23433.

#### Compatibilizing Agent

In blends of the present invention, a compatibilizing agent should be employed in the preparation of the composition in amounts up to about 25 wt%, with 0 to about 10 wt% preferred, and about 0.4 to about 3.0 wt% especially preferred, based on the total weight of the composition. The two-fold purpose for using compatibilizing agents is to improve, in general, the physical properties of the polyphenylene ether-polyamide resin blend, as well as to enable the use of a greater proportion of the polyamide component. When used herein, the expression "compatibilizing agent" refers to those

polyfunctional compounds which interact with either the polyphenylene ether, the polyamide resin, or both. This interaction may be chemical (e.g. grafting) or physical (e.g. affecting the surface characteristics of the dispersed phases). In either instance the resulting polyphenylene ether-polyamide composition appears to exhibit improved compatibility, particularly as evidenced by enhanced impact strength, mold knit line strength and/or elongation. As used herein, the expression "compatibilized polyphenylene ether-polyamide base resin" refers to those compositions which have been physically or chemically compatibilized with an agent as discussed above, as well as those compositions which are physically compatible without such agents, as taught in U.S. Pat. No. 3,379,792.

Examples of the various compatibilizing agents that may be employed in the practice of the present invention include: a) liquid diene polymers, b) epoxy compounds, c) oxidized polyolefin wax, d) quinones, e) organosilane compounds, f) polyfunctional compounds and functionalized polyphenylene ether as described obtained by reacting one or more of the previously mentioned compatibilizing agents with polyphenylene ether hereinafter.

Liquid diene polymers (a) suitable for use herein include homopolymers of a conjugated diene with at least one monomer selected from other conjugated dienes; vinyl monomer, e.g. styrene and alpha-methyl styrene; olefins, e.g. ethylene, propylene, butene-1, isobutylene, hexene-1, octene-1 and dodecene-1, and mixtures thereof, having a number average molecular weight of about 150 to about 10,000 preferably about 150 to about 5,000. These homopolymers and copolymers can be produced by the methods described in, for example, U.S. Pat. Nos. 4,054,612; 3,876,721 and 3,428,699 and include, among others, polybutadiene, polyisoprene, poly(1,3-pentadiene),

poly(butadiene-isoprene), poly(styrene-butadiene), polychloroprene, poly(butadiene- $\alpha$  methylstyrene), poly(butadiene-styrene-isoprene), poly(butylene-butadiene), and the like.

5 Epoxy compounds (b) suitable for use in the practice of the present invention include: (1) epoxy resins produced by condensing polyhydric phenols (e.g. bisphenol-A, tetrabromobisphenol-A, resorcinol and hydroquinone) and epichlorohydrin; (2) epoxy resins produced by  
10 condensing polyhydric alcohols (e.g., ethylene glycol, propylene glycol, butylene glycol, polyethylene glycol, polypropylene glycol, pentaerythritol and trimethylolethane and the like) and epichlorohydrin, (3) glycidyletherified products of monohydric alcohols and monohydric phenols including phenyl glycidylether, butyl glycidyl ether and cresyl glycidylether; (4) glycidyl derivatives of amino compounds for example, the diglycidyl  
15 derivate of aniline, (5) epoxidized products of higher olefinic or cycloalkene, or natural unsaturated oils (e.g. soybean) as well as of the foregoing liquid diene polymers; and the like.

Oxidized polyolefin waxes (c) are well known and an illustrative description thereof and processes for the production of the same are found in U.S. Pat. Nos. 3,822,227 and 3,756,999. Generally, these are  
20 prepared by an oxidation or suspension oxidation of polyolefin. An especially preferred polyolefin wax is "Hoechst Wachs".

Quinone compounds (d) suitable for use herein are characterized as having in the molecule of the unsubstituted derivative at least one six-membered carbon ring; at least two carbonyl groups in the ring  
25 structure, both of which may be in the same or, if more than one ring, different rings, provided that they occupy positions corresponding to the 1,2- or 1,4-orientation of the monocyclic quinone; and at least two carbon-carbon

double bonds in the ring structure, said carbon-carbon double bonds and carbonyl carbon-oxygen double bonds in the ring structure, said carbon-carbon double bonds and carbonyl carbon-oxygen double bonds being conjugated with respect to each other. Where more than one ring is present in the unsubstituted quinone, the rings may be fused, non-fused, or both: non-fused rings may be bound by a direct carbon-carbon double bond or by a hydrocarbon radical having conjugated unsaturation such as  $-C=C-C=C-$ .

Substituted quinones are also within the scope of the present invention. The degree of substitution; where substitution is desired, may be from one to the maximum number of replaceable hydrogen atoms. Exemplary of the various substituents that may be present on the unsubstituted quinone structures include halogen (e.g. chlorine, bromine, fluorine, etc.), hydrocarbon radicals including branched and unbranched, saturated and unsaturated alkyl, aryl, alkyl aryl and cycloalkyl radicals and halogenated derivatives thereof; and similar hydrocarbons having hetero atoms therein, particularly oxygen, sulfur, or phosphorous and wherein the same connects the radical to the quinone ring (e.g. oxygen link).

Exemplary of the various quinones there may be given 1,2- and 1,4-benzoquinone; 2,6-diphenyl quinone; tetramethyldiquinone; 2,2'- and 4,4'-diphenylquinone; 1,2-, 1,4- and 2,6-naphthoquinone; chloranils; 2-chloro- 1,4-benzoquinone; 2,6-dimethyl benzoquinone; and the like.

Organosilane compounds (e) suitable as compatibilizing agents are characterized as having in the molecule (a) at least one silicon atom bonded to a carbon through an oxygen link and (b) at least one carbon-carbon double bond or carbon-carbon triple bond and/or a functional group selected from an amine group or a mercapto group provided that the functional group is not directly bonded to the silicon atom.

In such compounds, the C-O-Si component is generally present as an alkoxyl or acetoxy group bonded directly to the silicon atom, wherein the alkoxyl or acetoxy group generally has less than 15 carbon atoms and may also contain hetero atoms (e.g. oxygen). Additionally, there may also be more than one silicon atom in the compound, such multiple silicon atoms, if present, being linked through an oxygen link (e.g. siloxanes), a silicon bond; or a bifunctional organic radical (e.g. methylene or phenylene groups); or the like.

Examples of suitable organosilane compounds include: gamma amino propyltriethoxy silane, 2-(3-cyclohexanyl)ethyl trimethoxy silane; 1,3-divinyl tetraethoxy silane; vinyl tris-(2-methoxyethoxy)silane; 5-bicycloheptenyl triethoxy silane and gamma mercapto propyl trimethoxy silane.

Polyfunctional compounds (f) which may be employed as compatibilizer in the practice of the present invention are of three types. The first type of polyfunctional compounds are those having in the molecule both (a) a carbon-carbon double bond or a carbon-carbon triple bond and b) at least one carboxylic acid, anhydride, amide, ester, imide, amino, epoxy, orthoester, or hydroxy group. Examples of such polyfunctional compounds include maleic acid; maleic anhydride; fumaric acid; glycidyl acrylate, itaconic acid; aconitic acid; maleimide; maleic hydrazide; reaction products resulting from a diamine and maleic anhydride, maleic acid, fumaric acid, etc.; dichloro maleic anhydride; maleic acid amide; unsaturated dicarboxylic acids (e.g. acrylic acid, butenoic acid, methacrylic acid, t-ethylacrylic acid, pentenoic acid); decenoic acids, undecenoic acids, dodecenoic acids, linoleic acid, etc.); esters, acid amides or anhydrides of the foregoing unsaturated carboxylic acids; unsaturated alcohols (e.g. alkyl alcohol, crotyl alcohol, methyl vinyl carbinol,

4-pentene-1-ol, 1,4-hexadiene-3-ol, 3-butene- 1,4-diol, 2,5-dimethyl-3-hexene-2,5-diol and alcohols of the formula  $C_nH_{2n-5}OH$ ,  $C_nH_{2n-7}OH$  and  $C_nH_{2n-9}OH$ , wherein n is a positive integer up to 30); unsaturated amines resulting from replacing from replacing the -OH group(s) of the above unsaturated alcohols with  $NH_2$  groups; and functionalized diene polymers and copolymers; and the like. Of these, two of the preferred compatibilizing agents for compositions of the present invention are maleic anhydride and fumaric acid.

The second group of polyfunctional compatibilizer compounds suitable for use herein are characterized as having both (a) a group represented by the formula (OR) wherein R is hydrogen or an alkyl, aryl, acyl or carbonyl dioxy group and (b) at least two groups each of which may be the same or different selected from carboxylic acid, acid halide, anhydride, acid halide anhydride, ester, orthoester, amide, imido, amino, and various salts thereof. Typical of this group of compatibilizers are the aliphatic polycarboxylic acids, acid esters and acid amides represented by the formula:



wherein R is a linear or branched chain, saturated aliphatic hydrocarbon of from 2 to 20, preferably 2 to 10, carbon atoms;  $R^I$  is hydrogen or an alkyl, aryl, acyl or carbonyl dioxy group of 1 to 10, preferably 1 to 6, most preferably 1 to 4, carbon atoms, especially preferred is hydrogen; each  $R^{II}$  is independently hydrogen or an alkyl or aryl group from 1 to 20 carbon atoms, preferably from 1 to 10 carbon atoms; each  $R^{III}$  and  $R^{IV}$  are independently hydrogen or an alkyl or aryl group of from 1 to 10, preferably from 1 to 6, most preferably 1 to 4, carbon atoms; m is equal to 1 and (n + s) is greater than or equal to 2, preferably equal to 2 or 3, and n and s are each greater than or equal to zero and wherein (OR<sup>I</sup>) is alpha or beta to a carbonyl group and at least two carbonyl groups are separated by 2 to 6 carbon atoms.

Obviously, R<sup>I</sup>, R<sup>II</sup>, R<sup>III</sup> and R<sup>IV</sup> cannot be aryl when the respective substituent has less than 6 carbon atoms.

Suitable polycarboxylic acids include, for example, citric acid, malic acid, agaricic acid, and the like; including the various commercial forms thereof, such as for example, the anhydrous and hydrated acids. Of these, citric acid is another of the preferred compatibilizing agents. Illustrative of esters useful herein include, for example, acetyl citrate and mono- and/or distearyl citrates and the like. Suitable amides useful herein include, for example, N,N'-diethyl citric acid amide; N-phenyl citric acid amide; N-dodecyl citric acid amide; N,N'-didodecyl citric acid amide and N-dodecyl malic acid present invention. Especially preferred derivatives are the salts thereof, including the salts with amines and/or preferably, the alkali and alkaline metal salts. Exemplary of suitable salts include calcium malate, calcium citrate, potassium malate, and potassium citrate.

The third group of polyfunctional compatibilizer compounds suitable for use herein are characterized as having in the molecule both (a) an acid halide group, most preferably an acid chloride group and (b) at least one carboxylic acid, anhydride, ester, epoxy, orthoester, or amide group, preferably a carboxylic acid or anhydride group. Examples of compatibilizers within this group include trimellitic anhydride acid chloride, chloroformyl succinic anhydride, chloroformyl succinic acid, chloroformyl glutaric anhydride, chloroformyl glutaric acid, chloroacetyl succinic anhydride, chloroacetylsuccinic acid, trimellitic acid chloride, and chloroacetyl glutaric acid. Among these, trimellitic anhydride acid chloride is preferred. Furthermore, it is especially preferred that compatibilizers of this group be prereacted with at least a portion of the polyphenylene ether whereby the compatibilizing agent is a polyphenylene ether-functionalized compound.

The foregoing compatibilizing agents are more fully described in U.S. Pat. Nos. 4,315,086; 4,600,741; 4,642,358; 4,826,933; 4,927,894; 4,980,424; 5,041,504; and 5,115,042.

5 The foregoing compatibilizing agents may be used alone or in various combinations of one another with another. Furthermore, they may be added directly to the melt blend or pre-reacted with either or both the polyphenylene ether and polyamide, as well as with other resinous materials employed in the preparation of the compositions of the present invention. With many of the foregoing compatibilizing agents, particularly the  
10 polyfunctional compounds, even greater improvement in compatibility is found where at least a portion of the compatibilizing agent is pre-reacted, either in the melt or in a solution of a suitable solvent, with all or a part of the polyphenylene ether. It is believed that such pre-reacting may cause the compatibilizing agent to react with the polymer and, consequently,  
15 functionalize the polyphenylene ether as noted above. For example, the polyphenylene ether may be pre-reacted with maleic anhydride to form an anhydride functionalized polyphenylene ether which has improved compatibility with the polyamide compared to a non-functionalized polyphenylene ether.

20 Where the compatibilizing agent is employed in the preparation of the compositions of the present invention, the initial amount used will be dependent upon the specific compatibilizing agent chosen and the specific polymeric system to which is added.

25 It is possible to use in the composition according to the invention any other known compatibilization system. Other systems have been described for example in U.S. Pat. No. 4,866,114.



### Impact Modifiers

All impact modifiers as generally used for compositions comprising a polyphenylene ether, a polyamide or a combination of a polyphenylene ether and a polyamide can be used, typically in an amount up to about 50%, with amounts of from 0 to about 20% preferred based on the total weight of the composition. Particularly suitable are the so called block copolymers, for example, A-B-A triblock copolymers and A-B diblock copolymers. The A-B and A-B-A type block copolymer rubber additives which may be used are thermoplastic rubbers comprised of one or two alkenyl aromatic blocks which are typically styrene blocks and a rubber block, e.g., a butadiene block which may be partially hydrogenated. Mixtures of these triblock copolymers and diblock copolymers are especially useful.

Suitable A-B and A-B-A type block copolymers are disclosed in, for example, U.S. Patent Nos. 3,078,254, 3,402,159, 3,297,793, 3,265,765, and 3,594,452 and U.K. Patent 1,264,741. Examples of typical species of A-B and A-B-A block copolymers include polystyrene-polybutadiene (SBR), polystyrene-poly(ethylene-propylene), polystyrene-polyisoprene, poly( $\alpha$ -methylstyrene)-polybutadiene, polystyrene-polybutadiene-polystyrene (SBR), polystyrene-poly(ethylene-propylene)-polystyrene, polystyrene-polyisoprene-polystyrene and poly( $\alpha$ -methylstyrene)-polybutadiene-poly( $\alpha$ -methylstyrene), as well as the selectively hydrogenated versions thereof, and the like. Mixtures of the aforementioned block copolymers are also useful. Such A-B and A-B-A block copolymers are available commercially from a number of sources, including Phillips Petroleum under the trademark SOLPRENE, Shell Chemical Co., under the trademark KRATON, Dexco under the tradename VECTOR, and Kuraray under the trademark SEPTON.

A useful amount of impact modifier is up to about 20 weight percent (wt%), with about 1 wt% to about 15 wt% preferred, and about 2 wt% to about 10 wt% especially preferred, wherein the weight percentages are based on the entire weight of the composition.

5     Additives

Compositions of the present invention can also include effective amounts of at least one additive selected from anti-oxidants, flame retardants, drip retardants, dyes, pigments, colorants, stabilizers, antistatic agents, plasticizers, lubricants, and mixtures thereof. These additives are known in  
10     the art, as are their effective levels and methods of incorporation. Effective amounts of the additives vary widely, but they are usually present in an amount up to about 50 wt% or more, based on the weight of the entire composition. Especially preferred additives include hindered phenols, thio compounds and amides derived from various fatty acids. The preferred  
15     amounts of these additives generally ranges up to about 2 wt% total combined weight based on the total weight of the composition.

Preparation

The preparation of the thermoplastic compositions can normally be achieved by merely blending the ingredients under conditions for the  
20     formation of an intimate blend. Such conditions often include mixing in single or twin screw type extruders or similar mixing devices which can apply a shear to the components.

All of the ingredients may be added initially to the processing system, or else certain additives may be precompounded with one or more of  
25     the primary components, preferably the polyphenylene ether, impact modifier and the polyamide. A masterbatch of talc can be made with

polyamide, at a ratio of about 5 wt% to 50 wt% talc, balance polyamide possible, with a ratio of about 40% to about 50% talc, balance polyamide preferred. Similarly, fibrils are also preferably part of a masterbatch with polyamide. The fibril ratio can be about 10% to about 30% fibrils, with about  
5 15% to about 25% fibrils, balance polyamide preferred.. The level of filler in a masterbatch is usually limited by a number of factors like, wetting behavior of filler by carrier polymer, viscosity increase of carrier polymer due to filler loading, etc.

For example, the thermoplastic composition can be made by compounding polyphenylene ether and a compatibilizer in an extruder, while maintaining the extruder at a sufficient temperature to melt the polyphenylene ether. The polyamide, a carbon masterbatch, and optionally the talc (or a filler) masterbatch can then be introduced to the extruder at a downstream port. The compounded mixture, polyamide, carbon masterbatch and talc masterbatch are then mixed to form the thermoplastic composition. The composition can be formed into pellets, sheets, film, coating, various components, or the like.

Alternatively, the polyphenylene ether, compatibilizer and talc can be added to the extruder with a portion of the polyamide (e.g. up to about 10 wt% of the polyamide). These components can then be compounded prior to introducing the remainder of the polyamide and a carbon/polyamide masterbatch. Again, the compounded mixture, polyamide, and carbon masterbatch can then be mixed to form the thermoplastic composition.

10 It appears that certain properties, such as impact strength and elongation, are sometimes enhanced by initially precompounding the polyphenylene ether and impact modifier, optionally with any other ingredients, prior to compounding with the polyamide resin, however, these

improvements are done at the expense of increasing the viscosity of the compatibilized composition. It is preferable that at least about 5 wt%, preferably at least about 8 wt%, and most preferably at least about 10 wt% polyamide be added with the polyphenylene ether and non-polymeric carboxylic acid. The remaining portion of the polyamide is fed through a port downstream. In this manner, the viscosity of the compatibilized composition is reduced without significant reduction in other key physical properties.

While separate extruders may be used in the processing, these compositions are preferably prepared by using a single extruder having multiple feed ports along its length to accommodate the addition of the various components. It is often advantageous to apply a vacuum or atmospheric pressure to the melt through at least one or more vent ports in the extruder to remove volatile impurities in the composition. Those of ordinary skill in the art will be able to adjust blending times and temperatures, as well as component addition, without undue additional experimentation.

It should be clear that the reaction products, compositions and articles made from the compositions made by the method of this disclosure are within the scope of the invention.

All patents cited are incorporated herein by reference.

The invention will be further described by the following examples which are meant to be illustrative, not limiting.

## Examples

Thermoplastic compositions A through I comprising the compositions set forth in the Table were prepared as follows:

5 Pre-mixes of 45 wt% talc Finntalc M15 from SA Omya Benelux NV, Brussels, Belgium and 55 wt% low IV polyamide (masterbatch talc/low IV PA) (i.e. with a viscosity, according ISO 307, between 123-129 ml/g); and 20 wt% carbon fibrils (BN fibrils as produced by Hyperion Catalysis International, Cambridge, MA 02138, USA) and 80 wt% low IV polyamide (masterbatch carbon/low IV PA) were prepared.

TABLE									
Formulation (Units: parts)	A	B	C	D	E	F	G	H	I
PPE	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8
low IV PA	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9
SEBS****	6	6	6	6	6	6	6	6	6
Additives*	1.81	1.81	1.81	1.81	1.81	1.81	1.81	1.81	1.81
TALC**	19.3	19.3	19.3	19.3	19.3	19.3	19.3	19.3	19.3
CCB					1.4	1.6	1.8	2.0	2.2
CF***	1.0	1.2	1.4	1.6					
Properties									
Specific Volume Resistivity (kOhm-cm)	26.15	0.616	0.239	0.153	15.92	2.88	2.34	0.8	0.47
Melt Volume Rate (cm <sup>3</sup> /10 min.)	22.2	18.2	16.1	14.2	17.7	13.5	12.9	9.4	8.1
Melt Viscosity (Pa-s)	145	142	144	150	185	192	190	198	188
Unnotched Izod Impact (kJ/m <sup>2</sup> )	39	35	38	34	38	37	39	33	27

10

\*additives: 0.7 citric acid; 0.1 KI/H<sub>2</sub>O (50/50 wt%); 0.01 copper iodide; 1.0 mineral oil

\*\*Talc: masterbatch talc/low IV PA (45/55 wt%)

\*\*\*CF: masterbatch carbon fibrils/low IV PA (20/80 wt%)

\*\*\*\*SEBS: styrene ethylene butylene styrene.

Materials have been produced on a Werner & Pfleiderer 28 extruder where, for formulations A-D polyphenylene ether, compatibilizer, impact modifier, flow promoter and stabilizers were fed via the first part of the extruder and the masterbatches (talc/PA & fibrils/PA) as well as PA were fed in a down stream feedport located on approximately 1/3 of the extruder. For formulations E-I same procedure was done, except for the CCB which was fed in a down stream feedport located on approximately 2/3 of the extruder. Temperature settings of the machine: 260-300-305-305-305-290-295-305-305-300-310°C. Melt temperature approximately 335°C, throughput rate 12 kg/hr, screw speed 300 rpm.

The properties were determined using ISO 1133 for melt volume rate (MVR) at (280°C/50 Newtons (N)); ISO 11443, 282°C/1,500 seconds<sup>-1</sup> (s) for melt viscosity (MV); and ISO 180 for unnotched Izod impact.

The specific volume resistivity was determined using a Netstal 60 molding machine having a screw diameter of 32 millimeters (mm), using a 285°C (±5°C) processing temperature, a mold temperature of 100°C (±5°C), a mass injection press I of 1,600 (±100) bar, a mass injection press II of 1,350 (±100) bar, an injection speed of 3.0 (±5) centimeters per second (cm/s), a cooling time of 25 (±2) seconds, and a total cycle time of 41 (±5) seconds. The tensile bar (ISO 3167) was notched with a razor blade on both ends of the narrow parallel portion. After the two adjacent sections were then broken in a brittle fashion, both fracture surfaces were painted with silver paint which was allowed to dry for at least 0.5 hours. The resistance was measured using a multimeter, and, using the dimensions of the part, the specific volume resistivity (SPV) was determined according to:

$$SPV = (\text{resistance measured})(\text{width})(\text{height}/\text{length}).$$

As can be seen from Blends A-D versus E-I, a substantial reduction in melt viscosity was achieved employing the carbon fibrils and the talc. Blends A-D attained a significantly lower melt viscosity, about 150 Pa·s or less, while Blends E-I possessed melt viscosities exceeding 180 Pa·s.

5 Surprisingly it was discovered that for the same conductivity range a composition made using a carbon fibril masterbatch did show a significant improvement in flow performance over a conductive carbon black composition without showing any significant difference in impact  
10 performance. Consequently, since the thermoplastic composition of the present invention advantageously effects flow, it can be employed to produce thinner parts (i.e. in thinner applications) and/or produce larger parts having a thickness comparable to conventional parts having a polyphenylene ether/polyamide composition. This invention is particularly useful in  
15 producing electrostatically paintable components, such as automotive parts and the like.

## WHAT IS CLAIMED IS:

1. A thermoplastic resin composition, comprising:  
  
about 10 wt% to about 50 wt% polyphenylene ether; about 35 wt% to about 65 wt% polyamide; about 5 wt% to about 40 wt% talc; and about 0.4 wt% to about 3.0 wt% carbon.
2. A thermoplastic resin composition as in Claim 1, wherein said carbon is carbon fibrils.
3. A thermoplastic resin composition as in Claim 1, wherein said talc is magnesium-silicate with an average particle size of about 3.0 microns to about 5.0 microns
4. A thermoplastic resin composition as in Claim 3, wherein said average particle size is about 4.0 microns to about 5.0 microns.
5. A thermoplastic resin composition as in Claim 3, wherein said talc has a particle size distribution of greater than about 90% under about 20 microns.
6. A thermoplastic resin composition as in Claim 5, wherein said talc has a particle size distribution of greater than about 95% under about 20 microns.
7. A thermoplastic resin composition as in Claim 5, wherein said talc has a particle size distribution of about 98% or greater under 20 microns.



8. A thermoplastic resin composition as in Claim 1, wherein said thermoplastic composition comprises about 15 wt% to about 30 wt% polyphenylene ether, about 45 wt% to about 55 wt% polyamide, about 15 wt% to about 25 wt% talc, about 0.6 wt% to about 1.5 wt% carbon fibrils, from 0 to about 10 wt% compatibilizing agent, and from 0 to 20 wt% impact modifier.

9. A thermoplastic resin as in Claim 8, wherein said composition has a melt viscosity of about 150 Pa·s or less.

10. A thermoplastic resin composition as in Claim 8, further comprising at least one additive, wherein said additives are anti-oxidants, flame retardants, drip retardants, dyes, pigments, colorants, stabilizers, antistatic agents, plasticizers, lubricants, or mixtures thereof; and at least one filler wherein said filler is mica, glass fibers, clay or mixtures thereof.

11. A thermoplastic resin composition as in Claim 8, wherein said compatibilizing agent is a liquid diene polymer, epoxy compound, polyfunctional compound, oxidized polyolefin wax, quinone, or a mixture thereof.

12. A thermoplastic resin composition as in Claim 11, wherein said compatibilizing agent is a carboxylic acid.

13. A thermoplastic resin composition as in Claim 12, wherein said carboxylic acid is maleic anhydride, citric acid, or a combination thereof.

14. A thermoplastic resin composition as in Claim 8, further comprising about 0.4 wt% to about 3.0 wt% compatibilizing agent.

15. A thermoplastic resin as in Claim 1, wherein said composition has a melt viscosity of about 150 Pa·s or less.

16. A thermoplastic resin composition as in Claim 1, further comprising at least one additive, wherein said additives are anti-oxidants, flame retardants, drip retardants, dyes, pigments, colorants, stabilizers, antistatic agents, plasticizers, lubricants, or mixtures thereof; and at least one filler, wherein said filler is mica, glass fibers, clay or mixtures thereof.

17. A thermoplastic resin composition as in Claim 1, further comprising from 0 to about 10 wt% compatibilizing agent.

18. A thermoplastic resin composition as in Claim 17, wherein said compatibilizing agent is a liquid diene polymer, epoxy compound, polyfunctional compound, oxidized polyolefin wax, quinone, or a mixture thereof.

19. A thermoplastic resin composition as in Claim 18, wherein said compatibilizing agent is maleic anhydride, citric acid, or a combination thereof.

20. A thermoplastic resin composition as in Claim 17, further comprising about 0.4 wt% to about 3.0 wt% compatibilizing agent.

21. A thermoplastic resin composition, comprising the reaction product of:

about 10 wt% to about 50 wt% polyphenylene ether; about 35 wt% to about 55 wt% polyamide; about 5 wt% to about 40 wt% talc; from 0 to about 10 wt% compatibilizing agent; and about 0.4 wt% to about 3.0 wt% carbon fibrils.

22. A thermoplastic resin composition as in Claim 21, further comprising the reaction product of from 0 to 20 wt% impact modifier.

23. A thermoplastic resin composition as in Claim 21, further comprising the reaction product of about 0.4 wt% to about 3.0 wt% compatibilizing agent.

24. A thermoplastic resin composition as in Claim 23, wherein said compatibilizing agent is a carboxylic acid.

25. A thermoplastic resin composition as in Claim 24, wherein said carboxylic acid is maleic anhydride, citric acid, or a combination thereof.

26. A method for making a thermoplastic resin composition, comprising:

forming a carbon masterbatch comprising about 10 wt% to about 30wt% carbon and about 70 wt% to about 90 wt% polyamide;

introducing polyphenylene ether and compatibilizer to an extruder;

maintaining the extruder at a sufficient temperature to melt the polyphenylene ether;

introducing polyamide and said carbon masterbatch to the extruder at a downstream port; and

forming a thermoplastic composition comprising the reaction product of: about 10 wt% to about 50 wt% polyphenylene ether; about 35 wt% to about 65 wt% polyamide; from about 0 to about 10.0 wt%

compatibilizer; and about 0.4 wt% to about 3.0 wt% carbon, based upon the total weight of the composition.

27. A method for making a thermoplastic resin composition as in Claim 26, further comprising forming a talc masterbatch comprising about 5 wt% to about 50 wt% talc and about 50 wt% to about 95 wt% polyamide; and introducing said talc masterbatch to the extruder at said downstream port, wherein the thermoplastic composition comprises the reaction product of: about 10 wt% to about 50 wt% polyphenylene ether; about 35 wt% to about 65 wt% polyamide; from about 0 to about 10.0 wt% compatibilizing agent; about 0.4 wt% to about 3.0 wt% carbon; and about 5 wt% to about 40 wt% talc; based upon the total weight of the composition.

28. A method as in Claim 27, further comprising introducing from 0 to about 20 wt% impact modifier, wherein the thermoplastic composition comprises the reaction product of: about 10 wt% to about 50 wt% polyphenylene ether; about 35 wt% to about 65 wt% polyamide; from about 0 to about 10.0 wt% compatibilizing agent; about 0.4 wt% to about 3.0 wt% carbon; about 5 wt% to about 40 wt% talc; and from 0 to about 20 wt% impact modifier based upon the total weight of the composition.

29. A method as in Claim 26, wherein said compatibilizing agent is a carboxylic acid.

30. A method as in Claim 26, wherein said carboxylic acid is maleic anhydride, citric acid, or a combination thereof.

31. An electrostatically paintable article made in accordance with Claim 26.

1/1

Figure 1: MVR as function of SVR


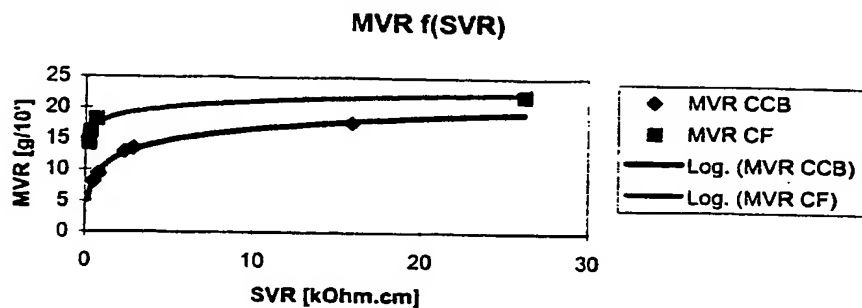


Figure 2: MV as function of SVR

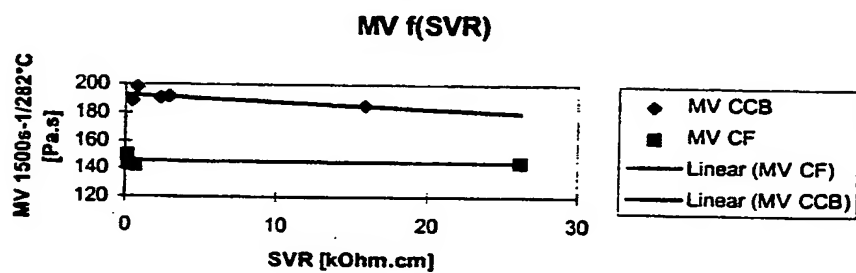

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/27907

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C08L77/00 C08L71/12 H01B1/24 C08K3/34

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08L H01B C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 685 527 A (GENERAL ELECTRIC) 6 December 1995 (1995-12-06) page 8, line 36 - line 46; claims 1,4-6,8,12-17,19,21; examples ---	1,15-20, 26-31
X	WO 94 23433 A (HYPERION CATALYSIS INT) 13 October 1994 (1994-10-13) cited in the application page 25, line 1 -page 27, line 17 page 10, line 37 -page 11, line 12; claims ---	1,2, 8-14, 21-25
A	EP 0 381 390 A (SUMITOMO CHEMICAL CO) 8 August 1990 (1990-08-08)  page 9, line 3 - line 6; claims --- -/--	1,2, 8-14, 21-25

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\* & \* document member of the same patent family

Date of the actual completion of the international search

12 January 2001

Date of mailing of the international search report

22/01/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Boeker, R

# INTERNATIONAL SEARCH REPORT

Inte. .lonal Application No  
PCT/US 00/27907

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 562 178 A (SUMITOMO CHEMICAL CO) 29 September 1993 (1993-09-29) claim 1; examples -----	1,21
A	US 5 124 391 A (GOETZ WALTER ET AL) 23 June 1992 (1992-06-23) claims 1,4; examples -----	1,21

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/27907

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0685527	A	06-12-1995	DE 69401919 D	10-04-1997
			DE 69401919 T	18-09-1997
			ES 2098818 T	01-05-1997
			JP 8048869 A	20-02-1996
			SG 32347 A	13-08-1996
			US 5977240 A	02-11-1999
			US 5741846 A	21-04-1998
WO 9423433	A	13-10-1994	US 5591382 A	07-01-1997
			AU 692767 B	18-06-1998
			AU 6418694 A	24-10-1994
			BR 9405848 A	26-12-1995
			CA 2159208 A	13-10-1994
			EP 0692136 A	17-01-1996
			JP 8508534 T	10-09-1996
			NZ 263476 A	24-03-1997
			US 5643502 A	01-07-1997
			US 5651922 A	29-07-1997
			ZA 9402250 A	01-11-1994
EP 0381390	A	08-08-1990	JP 2202547 A	10-08-1990
			JP 3015812 B	06-03-2000
			CA 2008734 A	31-07-1990
			US 5559185 A	24-09-1996
EP 0562178	A	29-09-1993	US 5334636 A	02-08-1994
			CA 2084117 A	27-09-1993
			EP 0562179 A	29-09-1993
			JP 6093177 A	05-04-1994
US 5124391	A	23-06-1992	DE 3929687 A	14-03-1991
			CA 2024712 A	08-03-1991
			DE 59003323 D	09-12-1993
			EP 0416436 A	13-03-1991
			ES 2045693 T	16-01-1994
			JP 3163164 A	15-07-1991